

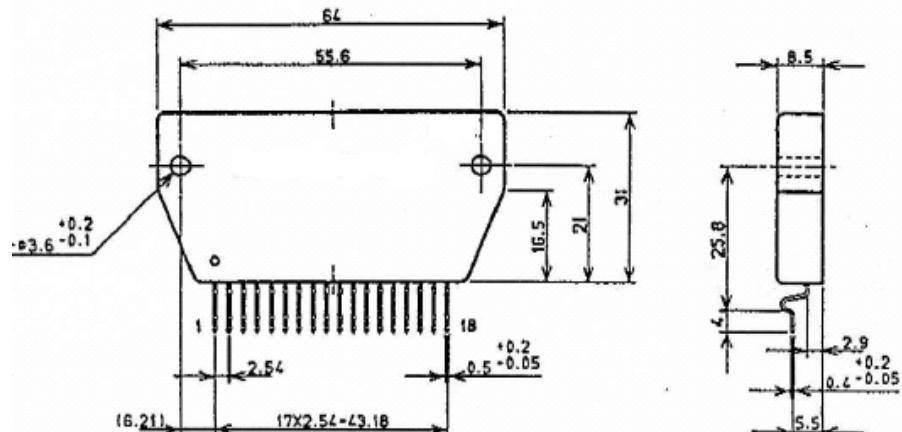
Thick Film Hybrid IC

STK433-100LF**2-channel class AB audio power IC, 100W+100W****Features**

- Pin-to-pin compatible outputs ranging from 80W to 150W.
- Output load impedance: $R_L=6\Omega$ supported
- Allowable load shorted time: 0.3 second
- Allows the use of predesigned applications for standby and mute circuits.

Series Models

| | STK433-090LF | STK433-100LF | STK433-120LF | STK433-130LF |
|---|----------------|-----------------|-----------------|-----------------|
| Output 1 (10%/1kHz) | 80Wx2 channels | 100Wx2 channels | 120Wx2 channels | 150Wx2 channels |
| Output 2(0.4%/20Hz to 20kHz) | 50Wx2 channels | 60Wx2 channels | 80Wx2 channels | 100Wx2 channels |
| Max. rated V_{cc} (quiescent) | $\pm 54V$ | $\pm 57V$ | $\pm 65V$ | $\pm 71.5V$ |
| Max. rated $V_{cc}(6\Omega)$ | $\pm 47V$ | $\pm 50V$ | $\pm 57V$ | $\pm 63V$ |
| Recommended operating $V_{cc}(6\Omega)$ | $\pm 33V$ | $\pm 35V$ | $\pm 40V$ | $\pm 44V$ |

Package Dimensions**Specifications**

Absolute maximum ratings at $T_a=25^\circ C$ (excluding rated temperature items), $T_c=25^\circ C$ unless otherwise specified

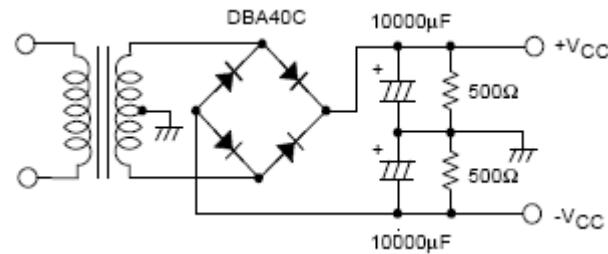
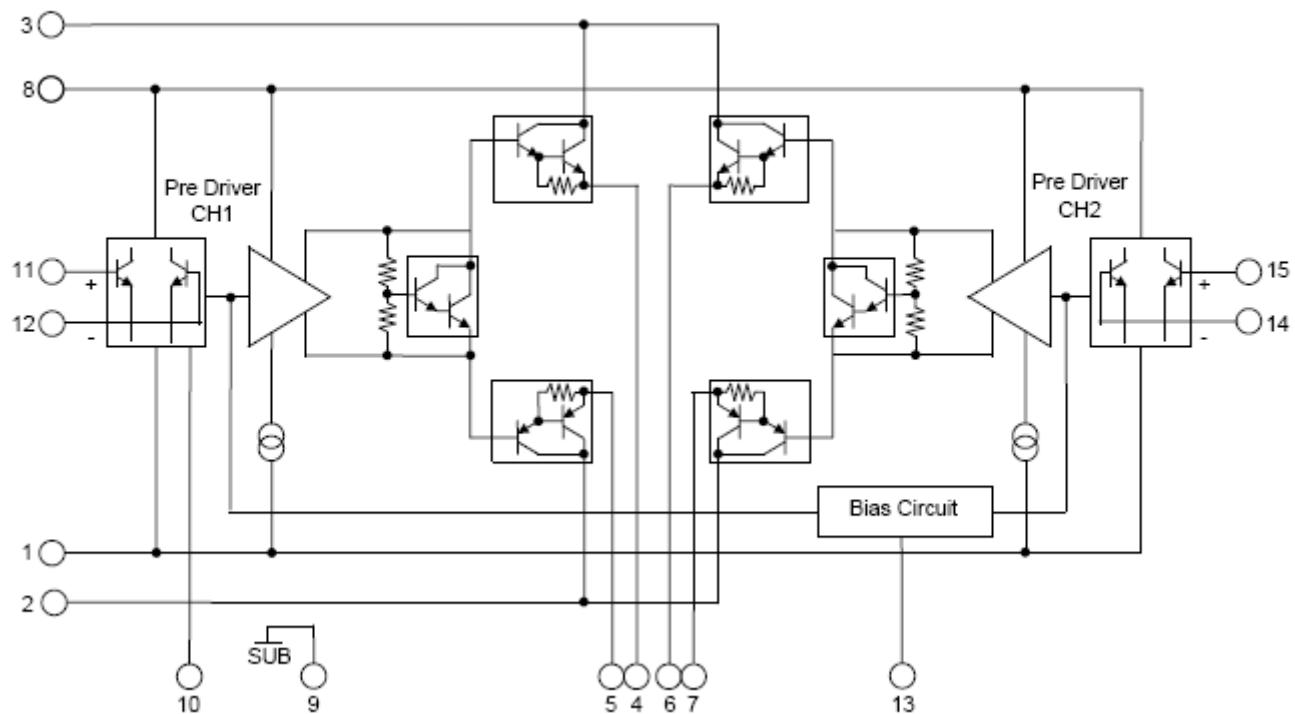
| Parameter | Symbol | Conditions | Ratings | Unit |
|---|------------------|--|-------------|--------------|
| Maximum quiescent supply voltage 0 | V_{CC} max (0) | When no signal | ± 57 | V |
| Maximum supply voltage 1 | V_{CC} max (1) | $R_L \geq 6\Omega$ | ± 50 | V |
| Minimum operating supply voltage | V_{CC} min | | ± 10 | V |
| Maximum operating flow-in current (pin 13) *7 | $I_{ST OFF}$ max | | 0.6 | mA |
| Thermal resistance | θ_{j-c} | Per power transistor | 1.8 | $^\circ C/W$ |
| Junction temperature | T_j max | Both the T_j max and T_c max conditions must be met. | 150 | $^\circ C$ |
| IC substrate operating temperature | T_c max | | 125 | $^\circ C$ |
| Storage temperature | T_{stg} | | -30 to +125 | $^\circ C$ |
| Allowable load shorted time *4 | t_s | $V_{CC}=\pm 35V$, $R_L=6\Omega$, $f=50Hz$, $P_O=60W$, 1-channel active | 0.3 | s |

STK433-100LF

Operating Characteristics at $T_c=25^\circ\text{C}$, $R_L=6\Omega$, $R_g=600\Omega$, $\text{VG}=30\text{dB}$, non-inductive load R_L , unless otherwise specified

| Parameter | Symbol | Conditions *2 | | | | | Ratings | | | unit |
|---|------------|-----------------|-------------|--------------|------------|--|-----------|------|-----|------------------|
| | | V_{CC} (V) | f (Hz) | P_O (W) | THD (%) | | min | typ | max | |
| Output power *1 | P_O (1) | ± 35 | 20 to 20k | | 0.4 | | 57 | 60 | | W |
| | P_O (2) | ± 35 | 1k | | 10 | | | 100 | | |
| Total harmonic distortion *1 | THD (1) | ± 35 | 20 to 20k | 5.0 | | $\text{VG}=30\text{dB}$ | | | 0.4 | % |
| | THD (2) | ± 35 | 1k | | | | | 0.01 | | |
| Frequency characteristics *1 | f_L, f_H | ± 35 | | 1.0 | | +0 -3dB | 20 to 50k | | | Hz |
| Input impedance | r_i | ± 35 | 1k | 1.0 | | | | 55 | | $\text{k}\Omega$ |
| Output noise voltage *3 | V_{NO} | ± 42 | | | | $\text{R}_g=2.2\text{k}\Omega$ | | | 1.0 | mVrms |
| Quiescent current | I_{CC0} | ± 42 | | | | No loading | 20 | 45 | 80 | mA |
| Output neutral voltage | V_N | ± 42 | | | | | -70 | 0 | +70 | mV |
| Current flowing into pin13 in standby mode *7 | IST ON | ± 35 | | | | Voltage at pin13: 5V, Current limiting resistance R1: 13k Ω | | | 0 | mA |
| Current flowing into pin13 in operating mode *7 | IST OFF | ± 35 | | | | | 0.25 | | 0.6 | mA |

Designated transformer power supply
(MG-200 equivalent)

**Internal Equivalent Circuit**

The End